


Standard Specifications

Model Type	H-32		
Item			
Frequency vs	12~30MHZ	Fund	100Ω
Equivalent Series Resistance	30~52MHZ	Fund	50Ω
Frequency Tolerance AT 25°C	±50ppm Max (±10ppm,±30ppm Available)		
Frequency Characteristics	±15ppm~±100ppm		
Operating Temperature Range	-10°C~+60°C Standard,-40°C~+85°C Extended		
Storage Temperature Range	-40°C~+85°C		
Load Capacitance	20 pF or Specify		
Shunt Capacitance	5.0 pf max		
Drive Level	100 μW max		
Aging (First year)	±3 PPM/Year max		

* Detail specifications refer to the individual specifications

H-32 DIMENSION (unit: mm)

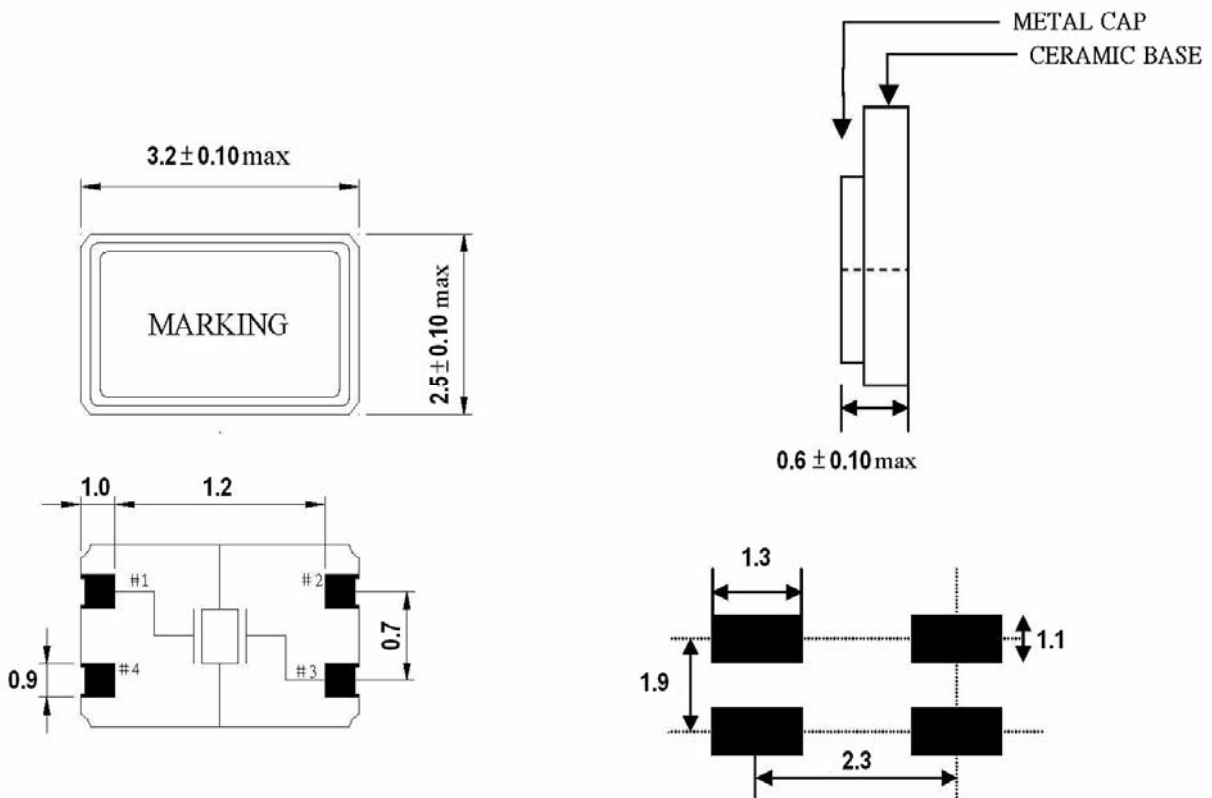

Pin 2 and pin 4 are connected ground

Recommended Land Pattern