


## Standard Specifications

Model Type	HO-14/HO-08	HO-14/HO-08
Item		
Frequency Range	1.00~125.00MHZ	1.00~100.00MHZ
Supply Voltage	+3.3V±10%	+5.0V±10%
Frequency Stability	±25,±50 ppm	
Operating Temperature Range	-10°C~+60°C Standard, -40°C~+85°C Extended	
Storage Temperature Range	-55°C~+125°C	
Frequency Current Consumption	1~20MHZ: 5~11 mA 2~80MHZ : 15~36 mA (MAX) 50 mA	
Output Symmetry (Duty)	40~60%(at 50% VDD)	
Output Level Vol (Max) Voh (Min)	0.33V 2.97V	0.5V 4.5V
Rise & Fall Time (T=25°C)		
1~50.00MHZ	10 ns max	10 ns max
51~100.000MHZ	5 ns max	5 ns max
Output Load	15PF	10TTL or 15PF

\*Detail specifications refer to the individual specifications

## Dimensions(unit:mm)

### HO-14

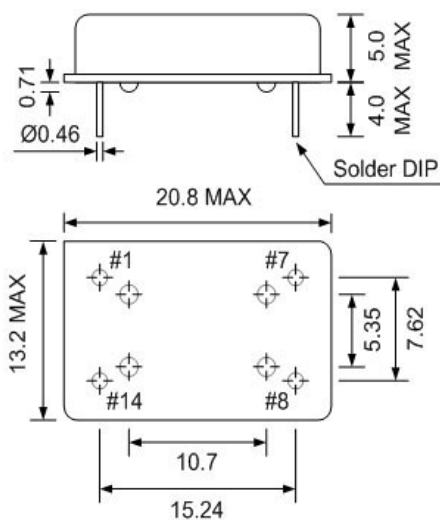

### HO-08

