


Standard Specifications

Model Type	HO-32(SMD)		
Item			
Frequency Range	2.00~50.00MHZ		
Supply Voltage	+1.8V±10%	+2.5V±10%	+3.3V±10%
Frequency Stability	±25,±50 ppm		
Operating Temp. Range	-10°C~+60°C Standard, -40°C~+85°C Extended		
Storage Temp. Range	-55°C~+125°C		
Frequency Current Consumption	5~15 mA max	6~20 mA max	7~20 mA max
Output Symmetry	40~60%(at 50%VVD)		
Output Level Vol (Max)	0.18V	0.25V	0.33V
Voh (Min)	1.62V	2.25V	2.97V
Rise/Fall time	7 ns (max)	5 ns (max)	5 ns (max)
Output Load	15PF		

* Detail specifications refer to the individual specifications

HO-32 DIMENSION (unit: mm)

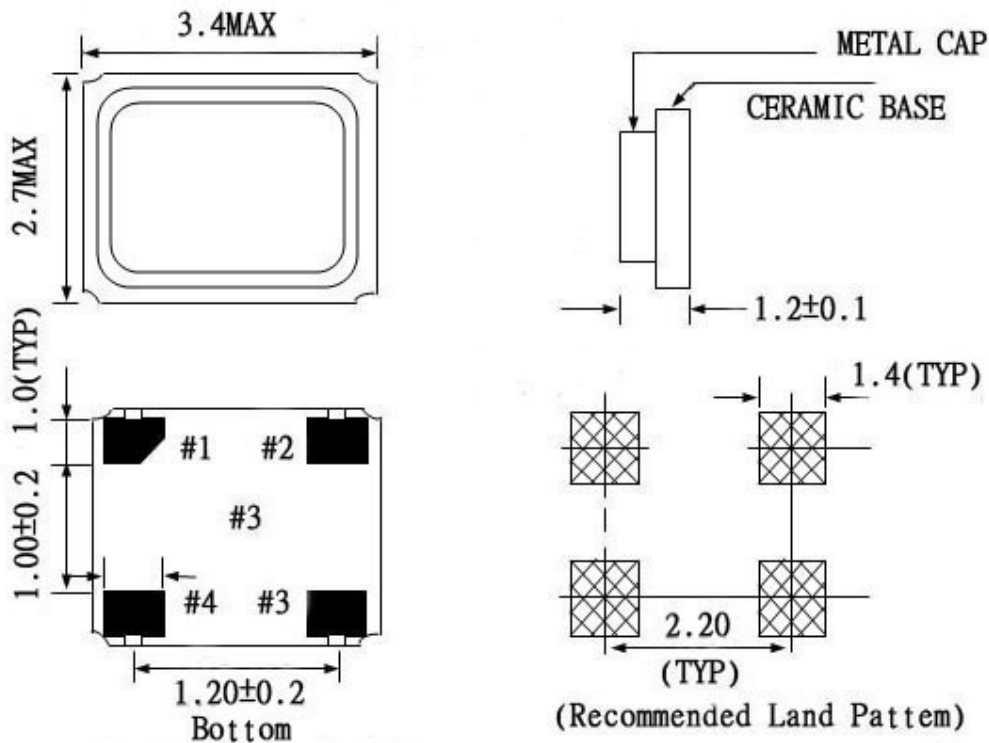

#1: E/D #2: GND
#4: VDD #3: OUTPUT

#1: ENABLE/DISABLE FUNCTION

INH(PIN1)→OUTPUT(PIN3)
High(Open)→Operating
Low→High impedance